


Spirit Levels, Angle Measurer Spirit Levels

DIGI PLUS-LINE® Electr. Digital Angle Measurer Spirit Level

- automatic calculation of single and double mitre angles without any other tools
- sturdy aluminium housing, with adjustable bevel blade
- large LCD display, digit height 12 mm, reading from all directions possible, with shifttable backlight
- rapid calculation and transfer of angles by means of memory function for frequently used angle dimensions
- power On/Off button, data hold function, shock resistant up to 1 m falling down
- precise mitre- and self-calibration function
- with 1x horizontal vial and 1x vertical vial
- with fixing screw for fixing the angle setting
- incl. 2x battery 1.5 V (type AAA, art.-no.: 609283)
- with carrying bag and operation manual



ART NO						
711020	0 - 225°	0.05°	0.1°	1 mm/m = ±0.057°	440 x 60 x 25	0.900

DIGI PLUS-LINE® Electr. Digital Angle Measurer Spirit Level

- for quick and accurate measuring of angular degrees, can also be used as a spirit level
- with 1x horizontal vial and 1x vertical vial
- sturdy aluminium housing, with adjustable bevel blade
- large LCD display with clear reading, digit height 12 mm
- On/Off and zero button, zero setting at any position
- incl. 1x 3 V battery (type CR2032, art. no. 2002093), with operation manual



ART NO						
711025	0° - 225°	0.1°	0.2°	1 mm/m = ±0.057°	305 x 52 x 23	0.275

10a


11

Electr. Digital Light Alloy Spirit Levels



Electr. Digital Light Alloy Spirit Level

- rugged, rectangular profile, made of light alloy
- large LCD display with clear reading, digit height 12 mm, with shiftable back light
- display always appears in the reading direction no matter which direction the device is rotated
- conversion between ABS- and INC-measurement
- calculation of ascend/descend, angle and deviation
- with self-calibration function
- power On/Off button, data hold function
- with 1 x horizontal vial and 1 x vertical vial
- incl. 2x battery 1.5 V (type AAA, art.-no.: 609283)
- with operation manual



ART N°					
712020	4 x 90°	0.1°	0.2°	416 x 50 x 21	0.308



Electr. Digital Light Alloy Spirit Level

- with cross laser, angle degree indicator and percent deviation
- rugged, rectangular profile, made of light alloy, with ribbed surface
- large LCD display, digit height 10 mm, reading from all directions possible
- switchable display in angle-, percentage measuring- and tangent-mode
- On/Off button, data hold function and memory function
- magnetic inserts in the bottom and M6 thread for tripod attachment
- with each 1x horizontal and 1x vertical vial
- with self-calibration and switchable cross laser, range about 7m (inside)
- incl. 1x 9 V battery (type 6LR61, art.-no.: 609281), with operation manual



with magnet inserts and M6 thread for tripod attachment




with cross laser



ART N°					
712010	4 x 90°	0.05°	0.1	225 x 57 x 25	0.278

Explore our website!

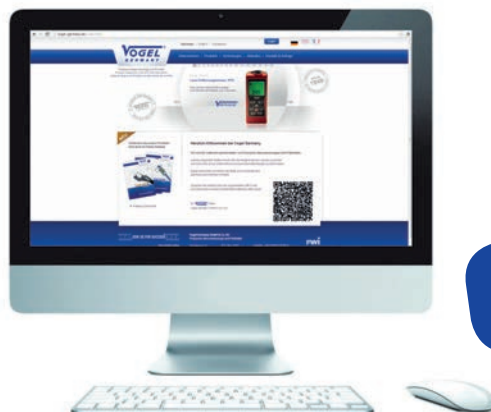

Any questions?
We are pleased to advise!

Spirit Levels

★★★★★ BLUE-LINE® Spirit Levels „NIVEAU NORM“

- top quality spirit levels with plane surfaces
- rugged light alloy rectangular profile, from up 1500 mm length with extrem solid wallthickness
- with 1x horizontal vial and 1x vertical vial
- barrel-shaped vials with patented SOLID built-in system, permanent fixed and constantly aligned with the profile
- surfaces in stratosilver elocated
- measuring accuracy adjusted by electronical adjustment and at final inspection
- measuring accuracy in normal position $0.5 \text{ mm/m} = 0.029^\circ$, with reversal measurement minimum $0.75 \text{ mm/m} = 0.043^\circ$

art-no. 714100 - 714110

- with strong adhesive magnet in the measurement base



ART N° 714100 - 714110



with strong adhesive magnet in the measurement base



plane, rectangular aluminium profile, extruded and warm cured

ART N° 714000 - 714010



ART N° 714100 - 714110



ART N°	mm	Profile	Magnet	Vial	Weight (KG)
714000	200	50 x 22	X	0.5 mm/m = ±0.029°	0.142
714001	300	50 x 22	X	0.5 mm/m = ±0.029°	0.194
714002	400	50 x 22	X	0.5 mm/m = ±0.029°	0.250
714003	500	50 x 22	X	0.5 mm/m = ±0.029°	0.299
714004	600	50 x 22	X	0.5 mm/m = ±0.029°	0.358
714005	800	50 x 22	X	0.5 mm/m = ±0.029°	0.422
714006	1000	50 x 22	X	0.5 mm/m = ±0.029°	0.565
714007	1200	50 x 22	X	0.5 mm/m = ±0.029°	0.682
714008	1500	50 x 22	X	0.5 mm/m = ±0.029°	1.105
714009	1800	50 x 22	X	0.5 mm/m = ±0.029°	1.226
714010	2000	50 x 22	X	0.5 mm/m = ±0.029°	1.366
714100	200	50 x 22	✓	0.5 mm/m = ±0.029°	0.210
714101	300	50 x 22	✓	0.5 mm/m = ±0.029°	0.266
714102	400	50 x 22	✓	0.5 mm/m = ±0.029°	0.383
714103	500	50 x 22	✓	0.5 mm/m = ±0.029°	0.482
714104	600	50 x 22	✓	0.5 mm/m = ±0.029°	0.509
714105	800	50 x 22	✓	0.5 mm/m = ±0.029°	0.614
714106	1000	50 x 22	✓	0.5 mm/m = ±0.029°	0.698
714107	1200	50 x 22	✓	0.5 mm/m = ±0.029°	0.809
714108	1500	50 x 22	✓	0.5 mm/m = ±0.029°	1.308
714109	1800	50 x 22	✓	0.5 mm/m = ±0.029°	1.554
714110	2000	50 x 22	✓	0.5 mm/m = ±0.029°	1.664

10a

11