

R2085 XXXX

HOLDING RAIL FOR SOCKETS

- > Holding rail for equipping with adaptors for wrench sockets in drive sizes 1/4", 3/8" and 1/2"
- > Can also be used in combinations, for individual tool requirements
- > Can be loaded on both sides
- > In various lengths, with two elongated holes for fixing
- > Aluminium
- > Delivery without adapter



R20852031



Equipping example



R20852052

Code	No.	↳ "inch" ↳	↳ mm ↳	↳ kg ↳
3300014	R20852031	8	200	0.040
3300015	R20852052	12	305	0.060

MATCHING SOCKET HOLDER FOR HOLDING RAILS

Code	No.	■ "	■	W	H	↳ kg ↳
3300017	R20940004	1/4	6.3	26	18.5	0.020
3300018	R20940005	3/8	10.0	26	20.5	0.020
3300019	R20940006	1/2	12.5	26	23.0	0.040

Impact tools range

Impact tool sockets

R6300 3008

IMPACT TOOL SOCKET SET 1/2"



8 pieces

- > Square drive as per DIN 3121 - G 12.5, ISO 1174
- > Acc. to DIN 3129, ISO 2725-2
- > Machine-operated, fixing with safety ring / pin
- > Surface phosphated
- > Chrome-molybdenum steel
- > In rugged plastic case



Code	No.	Contents	L	W	D	pieces	↳ kg ↳
3300575	R63003008	Impact socket 1/2" 10 12 13 14 17 19 21 24 mm	190	110	52	8	1.100

R63003012

IMPACT TOOL SOCKET SET

1/2"



12 pieces

- > Square drive as per DIN 3121 - G 12.5, ISO 1174
- > Acc. to DIN 3129, ISO 2725-2
- > Machine-operated, fixing with safety ring / pin
- > Surface phosphated
- > Chrome-molybdenum steel
- > In rugged plastic case



Code	No.	Contents	L	W	D	pieces	
3300574	R63003012	Impact socket 10 11 12 13 14 15 16 17 19 21 22 24 mm	300	180	52	12	1.598

R63043003

IMPACT SOCKET SET

1/2"



3 pieces

- > Specially for fitting / removing wheels of vehicles
- > Plastic sleeves for damage-free work on aluminium wheel rims
- > Colour coding for ease in identifying the right size
- > Square drive as per DIN 3121 - G 12.5, ISO 1174
- > Acc. to DIN 3129, ISO 2725-2
- > Machine-operated, fixing with safety ring / pin
- > Surface phosphated
- > Chrome-molybdenum steel
- > In rugged plastic case



Code	No.	Contents	L	W	D	pieces	
3300578	R63043003	Impact socket 17 19 21 mm 86 mm	158	138	51	3	0.830

Impact sockets 1/2" drive

R6300XXXX
IMPACT SOCKET 1/2"

hexagon, short

- > Machine-operated, fixing with safety ring / pin
- > Surface phosphated
- > Acc. to DIN 3129, ISO 2725-2
- > Square drive as per DIN 3121 - G 12.5, ISO 1174
- > Chrome-molybdenum steel



Code	No.	□"	□	⊙ mm	├─ mm ┤	∅ 1	∅ 2	⚖
3300525	R63001006	1/2	12.5	10	38	17.0	25.0	0.068
3300526	R63001106	1/2	12.5	11	38	18.5	25.0	0.075
3300527	R63001206	1/2	12.5	12	38	19.5	25.0	0.072
3300528	R63001306	1/2	12.5	13	38	21.0	25.0	0.072
3300529	R63001406	1/2	12.5	14	38	22.0	25.0	0.076
3300530	R63001506	1/2	12.5	15	38	23.5	30.0	0.076
3300531	R63001606	1/2	12.5	16	38	24.5	30.0	0.080
3300532	R63001706	1/2	12.5	17	38	26.0	30.0	0.088
3300533	R63001906	1/2	12.5	19	38	28.5	30.0	0.096
3300534	R63002106	1/2	12.5	21	38	31.0	30.0	0.114
3300535	R63002206	1/2	12.5	22	38	32.0	30.0	0.148
3300536	R63002408	1/2	12.5	24	45	35.0	30.0	0.154
3300537	R63002709	1/2	12.5	27	50	38.0	30.0	0.154
3300538	R63003009	1/2	12.5	30	50	41.0	30.0	0.240
3300539	R63003209	1/2	12.5	32	50	44.0	30.0	0.232

R6300XXXX
IMPACT SOCKET 1/2"

hexagon, long pattern

- > Machine-operated, fixing with safety ring / pin
- > Surface phosphated
- > Acc. to DIN 3129, ISO 2725-2
- > Square drive as per DIN 3121 - G 12.5, ISO 1174
- > Chrome-molybdenum steel



Code	No.	□"	□	⊙ mm	├─ mm ┤	∅ 1	∅ 2	⚖
3300540	R63001016	1/2	12.5	10	78	17.0	25.0	0.126
3300541	R63001116	1/2	12.5	11	78	18.5	25.0	0.132
3300542	R63001216	1/2	12.5	12	78	19.5	25.0	0.144
3300543	R63001316	1/2	12.5	13	78	21.0	25.0	0.146
3300544	R63001416	1/2	12.5	14	78	22.0	25.0	0.170
3300545	R63001516	1/2	12.5	15	78	23.5	30.0	0.178
3300546	R63001616	1/2	12.5	16	78	24.5	30.0	0.218
3300547	R63001716	1/2	12.5	17	78	26.0	30.0	0.224
3300699	R63001815	1/2	12.5	18	78	27.5	30.0	0.260
3300548	R63001916	1/2	12.5	19	78	28.5	30.0	0.244
3300700	R63002015	1/2	12.5	20	78	30.0	30.0	0.280
3300549	R63002116	1/2	12.5	21	78	31.0	30.0	0.260
3300550	R63002216	1/2	12.5	22	78	32.0	30.0	0.338
3300701	R63002315	1/2	12.5	23	78	33.0	30.0	0.280
3300551	R63002416	1/2	12.5	24	78	35.0	30.0	0.350
3300703	R63002715	1/2	12.5	27	78	38.0	30.0	0.320
3300705	R63003015	1/2	12.5	30	78	41.0	30.0	0.350
3300706	R63003215	1/2	12.5	32	78	44.0	30.0	0.350


R6304XXXX

IMPACT SOCKET 1/2"



Hexagon with protective sleeve

- > Specially for fitting / removing wheels of vehicles
- > Plastic sleeves for damage-free work on aluminium wheel rims
- > Colour coding for ease in identifying the right size
- > Machine-operated, fixing with safety ring / pin
- > Surface phosphated
- > Square drive as per DIN 3121 - G 12.5, ISO 1174
- > Acc. to DIN 3129, ISO 2725-2
- > Chrome-molybdenum steel

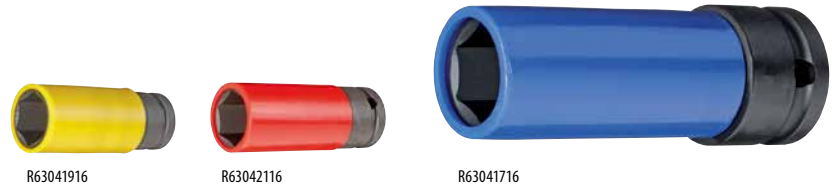

Code	No.	□"	□	○mm	↳mm↳	Ø 1	Ø 2	Colour
3300585	R63041716	1/2	12.5	17	86	25.6	30	blue
3300586	R63041916	1/2	12.5	19	86	28.8	30	yellow
3300587	R63042116	1/2	12.5	21	86	30.8	30	red

Impact accessories 1/2"

R6610XXXX

IMPACT EXTENSION 1/2"



- > Machine-operated, fixing with safety ring / pin
- > Surface phosphated
- > Coupler as per DIN 3121 - F 12.5, ISO 1174
- > Square drive as per DIN 3121 - G 12.5, ISO 1174
- > Chrome-molybdenum steel



Code	No.	□"	□	■"	■	↳mm↳	Ø 1	Ø 2	kg
3300570	R66100024	1/2	12.5	1/2	12.5	125	16	25	0.230
3300571	R66100049	1/2	12.5	1/2	12.5	250	16	25	0.443

R6630 0014

IMPACT UNIVERSAL JOINT 1/2"



- > Machine-operated, fixing with safety ring / pin
- > Surface phosphated
- > Coupler as per DIN 3121 - F 12.5, ISO 1174
- > Square drive as per DIN 3121 - G 12.5, ISO 1174
- > Chrome-molybdenum steel



Code	No.	□"	□	■"	■	↳mm↳	Ø 1	Ø 2	kg
3300650	R66300014	1/2	12.5	1/2	12.5	63	34	30	0.236

R67400008IMPACT SOCKET EXTENSION PIECE
1/2" TO 3/4"

- > Machine-operated, fixing with safety ring / pin
- > Surface phosphated
- > Coupler as per DIN 3121 - F 20, ISO 1174
- > Square drive as per DIN 3121 - G 12.5, ISO 1174
- > Chrome-molybdenum steel



Code	No.	□"	□	■"	■	↳ mm ◀	Ø 1	⚖
3300573	R67400008	1/2	12.5	3/4	20	49	30	0.140

R67600005IMPACT SOCKET REDUCER
1/2" TO 3/8"

- > Machine-operated, fixing with safety ring / pin
- > Surface phosphated
- > Coupler as per DIN 3121 - F 10, ISO 1174
- > Square drive as per DIN 3121 - G 12.5, ISO 1174
- > Chrome-molybdenum steel



Code	No.	□"	□	■"	■	↳ mm ◀	Ø 1	⚖
3300572	R67600005	1/2	12.5	3/8	10	38	30	0.070

R6398XXXX

SAFETY RING / 9IN 1/2"

- > Consisting of safety ring and safety pin
- > For securing impact sockets



Code	No.	■"	■ Use	Model	⚖
3300576	R63981005	1/2	12.5 for size 8-14 mm	Pin 20 x 3 mm, ring 19 x 4 mm	0.003
3300577	R63981105	1/2	12.5 for size 15-32 mm	Pin 25 x 3 mm, ring 24 x 4 mm	0.005

Impact sockets 3/4" drive

R7300 XXXX SET IMPACT SOCKETS 3/4"



short

- > Machine-operated, fixing with safety ring / pin
- > Surface phosphated
- > Acc. to DIN 3129, ISO 2725-2
- > Square drive as per DIN 3121 - H 20, ISO 1174
- > Chrome-molybdenum steel



Code	No.	□"	□	⊙mm	↳mm↳	∅ 1	∅ 2	⚖
3300591	R73001909	3/4	20	19	51	32	44	0.340
3300593	R73002209	3/4	20	22	51	37	44	0.354
3300594	R73002309	3/4	20	23	51	38	44	0.340
3300595	R73002409	3/4	20	24	52	39	44	0.354
3300598	R73002710	3/4	20	27	54	43	44	0.388
3300599	R73002810	3/4	20	28	54	44	44	0.380
3300601	R73003010	3/4	20	30	54	46	44	0.428
3300602	R73003210	3/4	20	32	56	49	44	0.472
3300603	R73003310	3/4	20	33	56	50	44	0.506
3300606	R73003610	3/4	20	36	56	54	44	0.514
3300608	R73003811	3/4	20	38	58	56	44	0.564
3300609	R73004111	3/4	20	41	58	59	44	0.594
3300610	R73004611	3/4	20	46	63	65	44	0.850

R7300 XXXX SET IMPACT SOCKETS 3/4"



long

- > Machine-operated, fixing with safety ring / pin
- > Surface phosphated
- > Acc. to DIN 3129, ISO 2725-2
- > Square drive as per DIN 3121 - H 20, ISO 1174
- > Chrome-molybdenum steel



Code	No.	□"	□	⊙mm	↳mm↳	∅ 1	∅ 2	⚖
3300612	R73001917	3/4	20	19	90	32	44	0.426
3300614	R73002117	3/4	20	21	90	35	44	0.456
3300615	R73002217	3/4	20	22	90	37	44	0.496
3300617	R73002417	3/4	20	24	90	39	44	0.470
3300620	R73002717	3/4	20	27	90	43	44	0.506
3300623	R73003017	3/4	20	30	90	49	44	0.626
3300624	R73003217	3/4	20	32	90	50	44	0.598
3300651	R73003317	3/4	20	33	90	50	44	0.780
3300652	R73003617	3/4	20	36	90	54	44	0.800
3300654	R73004117	3/4	20	41	90	59	44	0.920
3300655	R73004617	3/4	20	46	90	65	44	1.400

Impact accessories 3/4"

R7510XXX
IMPACT EXTENSION
3/4"



- > Machine-operated, fixing with safety ring / pin
- > Surface phosphated
- > Coupler as per DIN 3121 - F 20, ISO 1174
- > Square drive as per DIN 3121 - H 20, ISO 1174
- > Chrome-molybdenum steel



Code	No.	□"	□	■"	■	↳mm↳	∅	⚖
3300631	R76100040	3/4	20	3/4	20.0	205		0.923
3300632	R76100059	3/4	20	3/4	20.0	300		1.223

R77400011
IMPACT SOCKET EXTENSION PIECE
3/4" TO 1"



- > Machine-operated, fixing with safety ring / pin
- > Surface phosphated
- > Coupler as per DIN 3121 - F 25, ISO 1174
- > Square drive as per DIN 3121 - H 20, ISO 1174
- > Chrome-molybdenum steel



Code	No.	□"	□	■"	■	↳mm↳	∅	⚖
3300637	R77400011	3/4	20.0	1	25	65	44	0.430

R77600010
IMPACT SOCKET REDUCER
3/4" TO 1/2"



- > Machine-operated, fixing with safety ring / pin
- > Surface phosphated
- > Coupler as per DIN 3121 - F 12,5, ISO 1174
- > Square drive as per DIN 3121 - H 20, ISO 1174
- > Chrome-molybdenum steel



Code	No.	□"	□	■"	■	↳mm↳	∅	⚖
3300633	R77600010	3/4	20.0	1/2	12.5	56	44	0.334

R73981005
SAFETY RING / 9IN 3/4"



- > Consisting of safety ring and safety pin
- > For securing impact sockets



Code	No.	■"	■ Use	Model	⚖
3300634	R73981005	3/4	20 for size 17-50 mm	Pin 35 x 4 mm, ring 36 x 5 mm	0.010

Impact sockets 1" drive

R8300XXXX IMPACT SOCKET 1"

hexagon, short



- > Machine-operated, fixing with safety ring / pin
- > Surface phosphated
- > Acc. to DIN 3129, ISO 2725-2
- > Square drive as per DIN 3121 - H 25, ISO 1174
- > Chrome-molybdenum steel



Code	No.	□"	□	⊙ mm	↳ mm ↲	∅ 1	∅ 2	⚖
3300657	R83002711	1	25	27	59	46.2	54	0.690
3300659	R83003011	1	25	30	61	50.0	54	0.710
3300660	R83003211	1	25	32	62	52.5	54	0.700
3300661	R83003311	1	25	33	62	54.0	54	0.690

R8300XXXX IMPACT SOCKET 1"

hexagon, long pattern



- > Machine-operated, fixing with safety ring / pin
- > Surface phosphated
- > Acc. to DIN 3129, ISO 2725-2
- > Square drive as per DIN 3121 - H 25, ISO 1174
- > Chrome-molybdenum steel



Code	No.	□"	□	⊙ mm	↳ mm ↲	∅ 1	∅ 2	⚖
3300674	R83002419	1	25	24	100	42.5	54	0.900
3300675	R83002719	1	25	27	100	46.2	54	1.000
3300676	R83003019	1	25	30	100	50.0	54	1.000
3300677	R83003219	1	25	32	100	52.5	54	1.100
3300678	R83003319	1	25	33	100	54.0	54	1.100
3300679	R83003619	1	25	36	100	57.5	54	1.200
3300680	R83003819	1	25	38	100	59.5	54	1.300
3300681	R83004119	1	25	41	100	62.0	54	1.400
3300682	R83004619	1	25	46	100	68.0	54	1.388

Impact accessories 1" drive

R8610059
IMPACT EXTENSION 1"

- > Machine-operated, fixing with safety ring / pin
- > Surface phosphated
- > Coupler as per DIN 3121 - F 25, ISO 1174
- > Square drive as per DIN 3121 - H 25, ISO 1174
- > Chrome-molybdenum steel



Code	No.	□"	□	■"	■	↳ mm ↳	⚖ kg
3300685	R86100059	1	25	1	25.0	300	2.030

**R83981105**
SAFETY RING / PIN 1"

- > Consisting of safety ring and safety pin
- > For securing impact sockets



Code	No.	■"	■ Use	Model	⚖ kg
3300708	R83981105	1	25 for size 24-80mm	Pin 45 x 5 mm, ring 45 x 7 mm	0.026